


L. B. RANDALL
SLEIGH

No. 17,232

Patented May 5, 1857

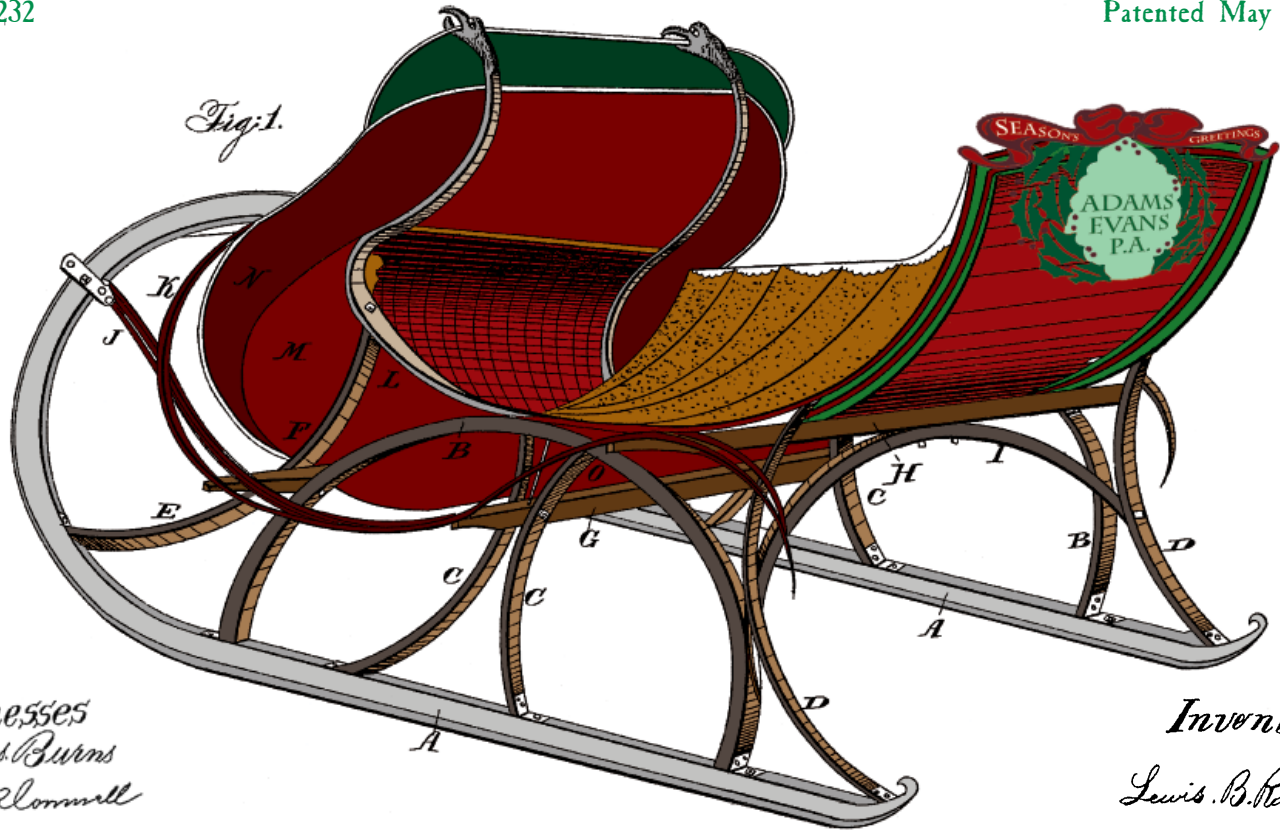

Witnesses
Jas Burns
Geot Lommill

Inventor.
Lewis B. Randall

UNITED STATES PATENT OFFICE

**LEWIS B. RANDALL, OF PENN YAN, NEW YORK.
SLEIGH AND CUTTER.**

Specification of Letters Patent No. 17,232, dated May 5, 1857.

To all whom it may concern:

Be it known that I, LEWIS B. RANDALL, of Penn Yan in the county of Yates and State of New York, have invented a new Improvement in Making Sleighs and Cutters; and I do hereby declare that the following is a full, clear, and exact description of the construction of the same, reference being had to the annexed drawing, making a part of this specification, in which—

Figure 1 is a perspective view of the whole except the tongue or thills.

A and A are the runners; B and B are knees made in a semicircular form with the ends attached to the runners and connected to the other parts as represented in the figure.

C and C are knees circular in form and are attached to the runners at equal distance from the center of B and B.

The upper ends are attached to the under side of B and B and at their nearest parts the beam G is placed between them and held by a bolt. These knees extend above the beam so that the part O is placed between the knees of opposite sides and serve as a brace above the beam.

D and D are the rear knees circular in form and they extend from the runners to the bodysill L.

E is one of the forward knees also circular in form and extends from the runner to the bodysill.

F is the forward beam and is fastened between the knees B and B with a bolt passed through them.

G is the middle beam and is held between the knees C and C by a bolt being put through them.

H is the hind beam and is fastened to the top of the circular brace I and the same

length as the other beams; its use is to support the rear portion of the body or seat.

I is a brace circular in form and is lined or strengthened with a plate of iron fastened on the front side with screws and extends to the bolts that hold the brace between the knees B and D.

J is a piece extending from the point of draft at the forward part of the runner to the rear of the sleigh and is fastened on the top of each beam.

K is a fender.

L is the bodysill bent in a manner so as to serve as a support for the dashboard and support for the seat; it is fastened on the knees D and B and upon the top of the knees B and B.

M is the lower part of the body. It is fastened to the forward beam and extends back to the middle beam; the back part is represented by O

which serves as a brace and back part of M also a support to the seat.

N is the dashboard, and may be made of any desired form or size and it extends from the beam F around the forward part of M and as far up the part L as is desired.

The beams are arranged one higher than the other to suit the shape of the body and to give strength laterally by having the union of the knees and beams each on a line independent of the other.

What I claim and desire to secure Letters Patent is—

The parts designated by the letters A, B, C, D, E, F, G, H, I, L and O, combined as and for the purpose set forth.

LEWIS B. RANDALL.

Witnesses:

Jas. BURNS,
Geo. R. CORNWELL.

*Season's Greetings
and all good wishes
for 2007*

ADAMS EVANS P.A.
Intellectual Property Law
Charlotte

Katell

A. M. J.

Brandon

J. Scott

Had

Jonathan

Stephen

Tom



Adams Evans P.A. will be moving across the street in February.

Watch for our announcement in your mail and in-box.

**Our new address will be Charlotte Plaza Suite 2350,
201 S. College St., Charlotte, NC 28244.**

Our Phone, Fax, E-Mail & Website Will all Remain the Same.